



Testing. Advising. Assuring.

Test report No. 2013-1538

for applying of a required "Verwendbarkeitsnachweis"
issued 27.05.2013

Applicant: Ludvig Svensson AB
Bangatan 8
51182 Kinna
Sweden

Date of order: 23.04.2013
Date of sampling: *no official sampling of the specimen by a representative of Exova Warringtonfire, Frankfurt*
Date of arrival: 29.04.2013
Date of test: 13.05.2013

Order

Testing of the flammability (building class B1) according to DIN 4102-1 (May 1998)

Description / designation of the test object

Textile designated as "View"

Description of the relevant test procedure

DIN 4102 part 1 (Mai 1998)

This test report did not replace the required „Verwendbarkeitsnachweis“. It is only used for issuing the "Verwendbarkeitsnachweis".

1. Description of the test material

1.1 Details of the customer:

Trade name "View"

Composition:

99% CS, 1% Aluminium

1.2 At the specimen preparation by Exova Warringtonfire, Frankfurt determined values:

Textiles specimen

Colour: beige-grey-aluminium

Weight per unit area: 108 g/m²

Test set: aluminum side faced to the burner

Testing after storing 14- days under climatic conditions (23°C / 50 % rel. humidity).

2. Test results

2.1.1 Brandschachtprüfung according to DIN 4102-1

Sample A: Material tested in production direction

Sample B: Material tested crosswise to the production direction

Test results of the Brandschacht tests part 1						
line no.		Measurements test sample				
			A	B	C	D
1	<u>no. test arrangement according to DIN 4102 part 15, table 1</u>		1	2		
2	<u>flame height max. over lower sample edge</u> time ¹⁾	cm	30	30		
		min : s	0:05	0:04		
3	<u>ascertainments on the front side</u> Flaming/glowing time ¹⁾	min : s	0:03	0:03		
4	<u>melting / burning through</u> time ¹⁾	min : s	0:05	0:05		
5	<u>ascertainments on the back side</u> Flaming/glowing time ¹⁾ discolouring time ¹⁾	min : s	no	no		
6		min : s	no	no		
7	<u>burning droplets</u> begin ¹⁾ extent occasional dropping of material constant dropping of material	min : s	no	no		
8						
9						
10	<u>separating from burning sample parts</u> begin ¹⁾ occasional separating parts constant separating parts	min : s	not occurred	not occurred		
11						
12						
13	duration of burning on the sieve tray (max.)	min : s	not occurred	not occurred		
14	<u>influence on the burner flame by dropping of / separating material</u> time ¹⁾	min : s	no	no		
15	<u>earlier end of test</u> end of the fire scenario on the sample ¹⁾ time of a possible resulted test stop ¹⁾	min : s	no	no		
16		min : s				

¹⁾ time from start of test

Test results of the Brandschacht tests part 2						
line no.		Measurements test sample				
			A	B	C	D
17	<u>flaming after end of test</u>	min : s	not occurred	not occurred		
18	duration		--/--	--/--		
19	number of sample	cm	--/--	--/--		
20	front side of sample		--/--	--/--		
21	backside of sample		--/--	--/--		
	flame length		--/--	--/--		
22	<u>glowing after end of test</u>	min . s	not occurred	not occurred		
23	duration		--/--	--/--		
	number of sample	cm	--/--	--/--		
24	place of occurrence		--/--	--/--		
25	lower sample part		--/--	--/--		
26	upper sample part		--/--	--/--		
27	front side of sample		--/--	--/--		
	backside of sample		--/--	--/--		
28	<u>smoke density</u>					
29	< 400 % x min		95	96		
30	> 440 % x min		--/--	--/--		
	diagram in annex no.		-	-		
31	<u>residual length</u>	cm				
	single results		70 / 64 68 / 66	72 / 68 67 / 66		
32	average of the single results	cm	67	68		
33	foto of the sample on page		5	5		
34	<u>smoke temperature</u>	°C				
35	max. of the average results		120	120		
36	time ¹⁾		0:35	0:50		
	diagram in annex no.		1	2		

¹⁾ time from start of test

Remarks: Due to the residual length of > 45 cm in two tests, the quantity of tests could be reduced, according to DIN 4102-16.

2.1.2 Appearance of the specimen after the test:

Sample A Length direction



Sample B Cross direction



2.2.1 Normal flammability test according to DIN 4102-1

Test with edge ignition without deposit
Flame application on: lower sample edge
Edge ignition

Length direction

Sample-no.	1	2	3	4	5
Time from start of test					
Ignition point [s]	1	1	1	1	1
Reaching the measuring mark within 20 seconds	no	no	no	no	no
Self extinguishing of the flame [s]	3	3	3	4	5
Max. flame height [mm]	70	60	80	80	100
Time [s]	2	2	2	2	3
End of afterflaming [s]	-	-	-	-	-
End of afterglowing [s]	-	-	-	-	-
Flames extinguished after [s]	-	-	-	-	-
Smoke development (visuell impression)	Low smoke production				
Separating from burning material	no	no	no	no	no
Time [s]	-	-	-	-	-

Remarks:

Cross direction

Sample-no.	1	2	3	4	5
Time from start of test					
Ignition point [s]	1	1	1	1	1
Reaching the measuring mark within 20 seconds	no	no	no	no	no
Self extinguishing of the flame [s]	3	3	3	3	3
Max. flame height [mm]	70	70	40	60	60
Time [s]	2	2	2	2	2
End of afterflaming [s]	-	-	-	-	-
End of afterglowing [s]	-	-	-	-	-
Flames extinguished after [s]	-	-	-	-	-
Smoke development (visuell impression)	Low smoke production				
Separating from burning material	no	no	no	no	no
Time [s]	-	-	-	-	-

Remarks:

Appearance of the sample after the small burner test:



Assessment

The material, described in chapter one fulfils the requirements of the building class B2 according to DIN 4102-1 (Mai 1998).

The determined test results show that the material also fulfils the requirements

of the building class B1

according to DIN 4102-1 (Mai 1998).

Special comment

The fire test result is only valid for the in chapter one described material in the tested colours.

The test was carried out in free hanging configuration.

The distance to other plane material must be more or equal then 40 mm.

The material wasn't tested after an outside storage.

In combination with other materials (for example coatings, deposits) the burning behaviour could be influenced unfavourable so that the classification above is not valid any longer. According to DIN 4102-1 the burning behaviour in combination with other materials has to be tested separately.

This test report did not replace the required „Verwendbarkeitsnachweis“. It is only used for issuing the “Verwendbarkeitsnachweis”.

This test report replace the translation of the report 2013-1538 issued 27th May 2013 (date of signature), which is invalid from now on.

Frankfurt, the 29.05.2013

A handwritten signature in blue ink, appearing to read "Anders".

H. Anders
tester in charge

A handwritten signature in blue ink, appearing to read "Brauer".

Dipl.-Ing. H. Brauer
Head of Exova Warringtonfire, Frankfurt

This Test report is valid until 27.05.2018



The results of the tests relate only to the behaviour of the test specimen which is designated on the top.

Test reports are only allowed to be published or reproduced, not changed in form and tenor without permission of the Exova Warringtonfire, Frankfurt. The abridged account of a test report is only allowed with the agreement of the Exova Warringtonfire, Frankfurt.

This test report is a translation of the German version 2013-1538 (issued 27.05.2013). In case of doubt only the German version is valid

This test report contains 8 pages and 2 annexes.

Sample A:

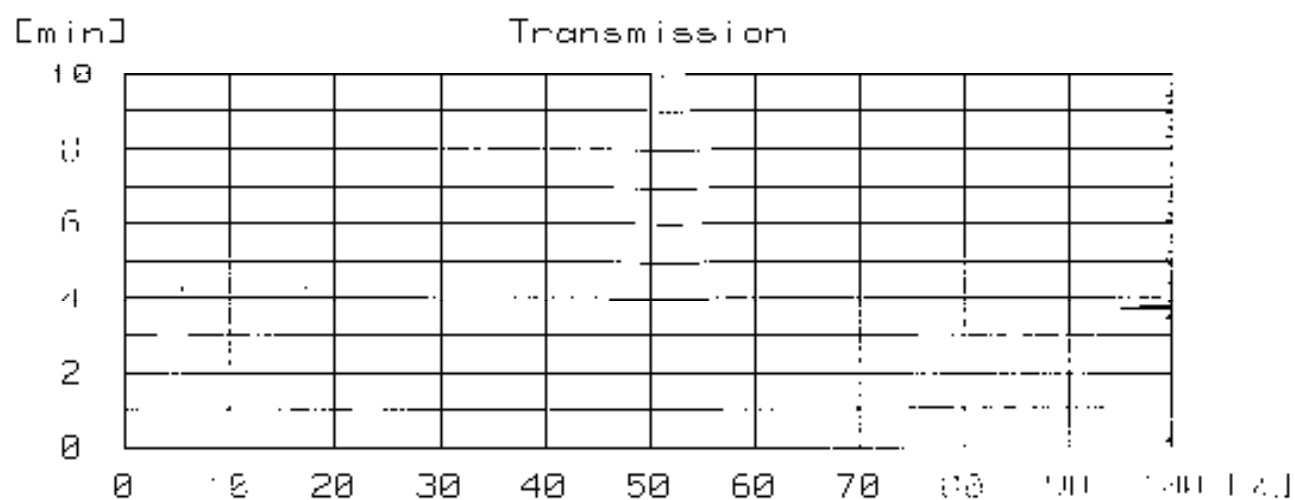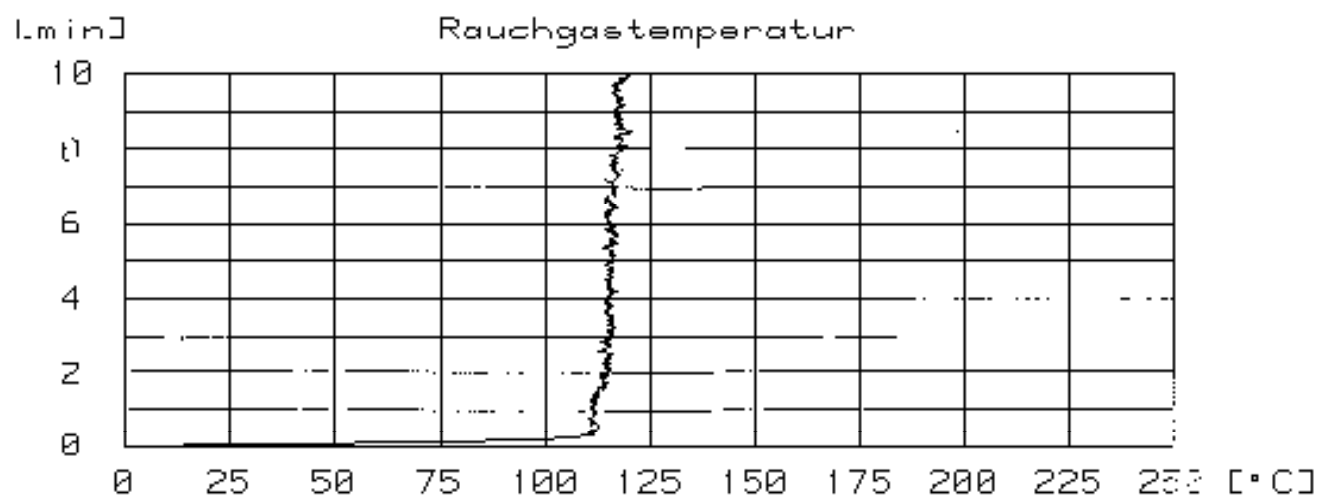

Sample B:

